


CALARC® DIVISION



- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING

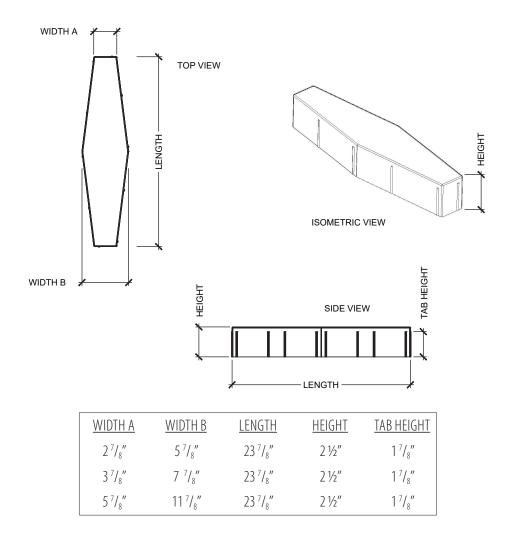


DIAMOND PAVER - GENERAL DETAILS


SCALE: N.T.S.

PAGE 19





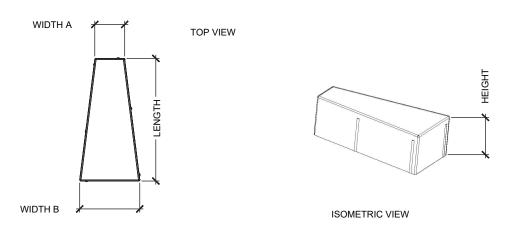



<u>WIDTH A</u>	WIDTH B	<u>LENGTH</u>	<u>HEIGHT</u>	TAB HEIGHT
27/8"	5 ⁷ / ₈ "	11 ⁵ / ₁₆ "	2 ½"	1 7/8"
3 7/8"	7 7/8"	11 ⁵ / ₁₆ "	2 ½"	1 7/8"
57/8"	11 7/8"	11 ⁵ / ₁₆ "	2 ½"	17/8"

- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




DIAMOND POINT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 20





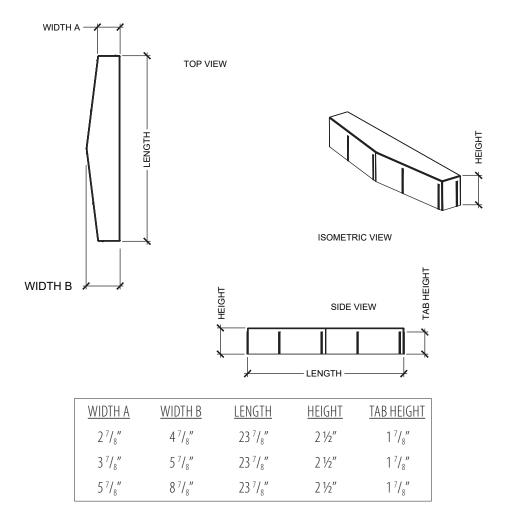

- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




DIAMOND FLAT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 21





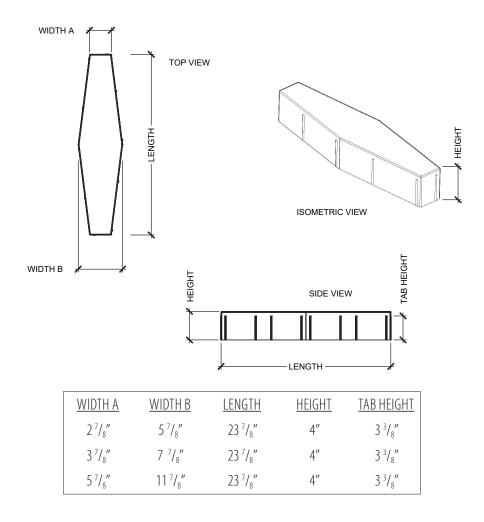

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




DIAMOND PAVER - GENERAL DETAILS


SCALE: N.T.S.

PAGE 22





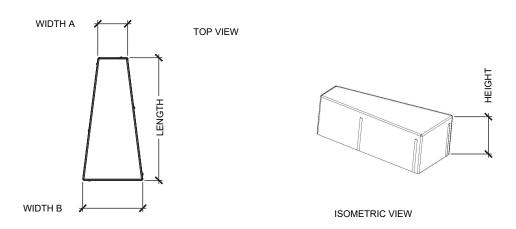



WIDTH A	WIDTH B	<u>LENGTH</u>	<u>HEIGHT</u>	TAB HEIGHT
27/8"	5 ⁷ / ₈ "	$11^{15}/_{16}"$	4"	$3^{3}/_{8}''$
3 7/8"	7 7/8"	$11^{15}/_{16}"$	4"	$3^{3}/_{8}^{"}$
5 ⁷ / ₈ "	11 ⁷ / ₈ "	$11^{15}/_{16}"$	4"	$3^{3}/_{8}^{"}$

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




DIAMOND POINT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 23



CALARC® DIVISION

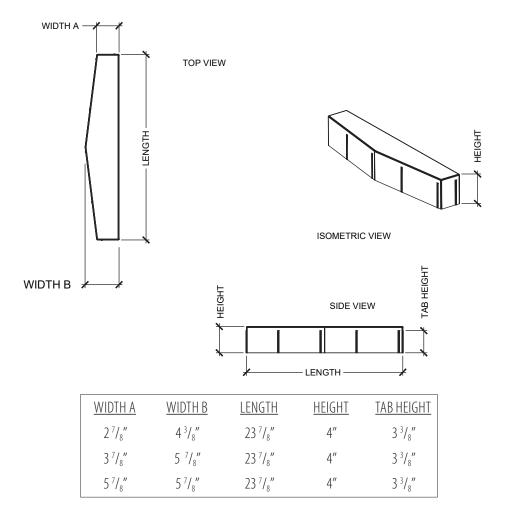

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING



DIAMOND FLAT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 24