


1. PAVERS SHOWN ABOVE SHALL BE 2 1/2" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. MADERASTONE® FINISH (WOOD GRAIN LOOK)
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES




MADERASTONE® PAVER - GENERAL DETAILS


SCALE: N.T.S.

PAGE 7


TOP VIEW

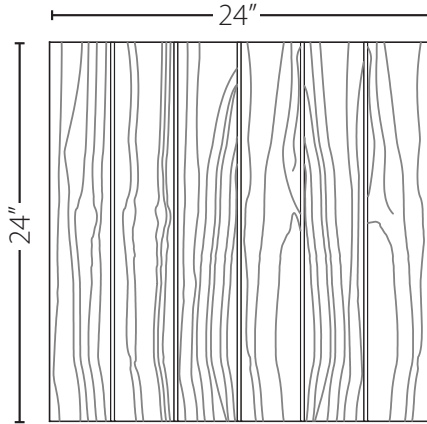


ISOMETRIC VIEW

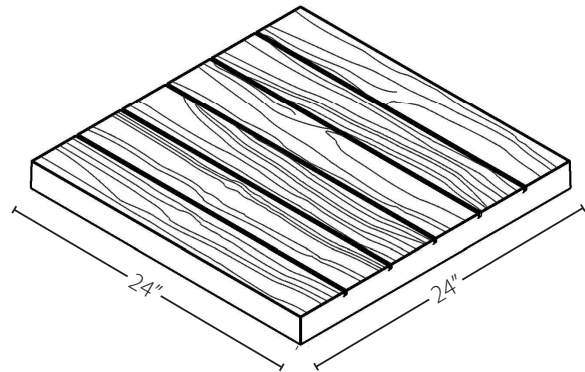

SIDE VIEW

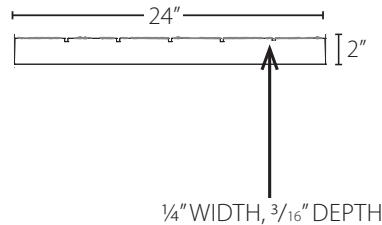

1. PAVERS SHOWN ABOVE SHALL BE 2" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. MADERASTONE® FINISH (WOOD GRAIN LOOK)
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



MADERASTONE® PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 8