






ISOMETRIC VIEW




1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




NARROW MODULAR PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 15

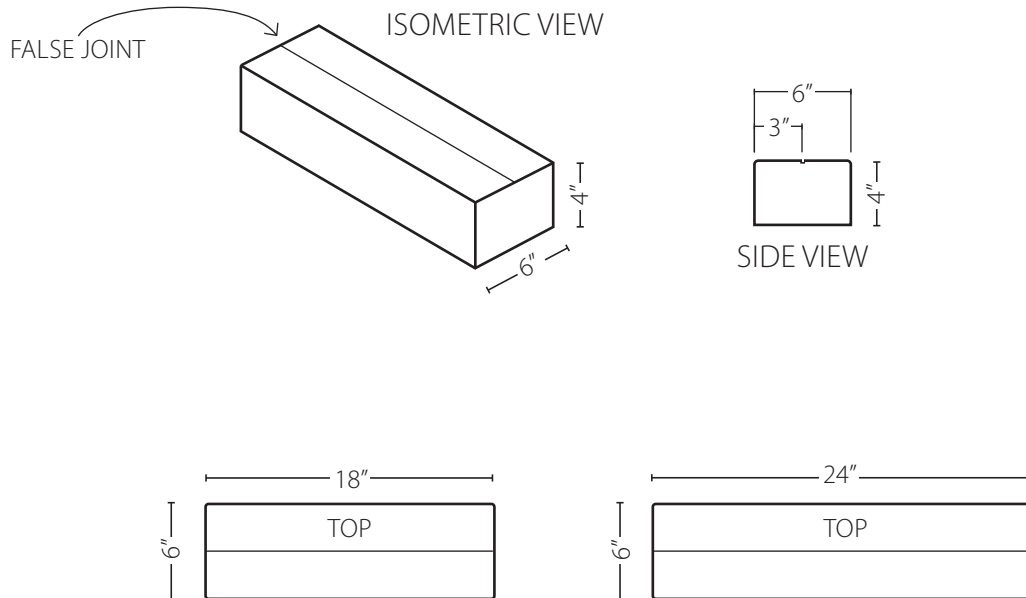

1. PAVERS SHOWN ABOVE SHALL BE 4" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES












NARROW MODULAR PAVER FALSE JOINT - DETAILS


SCALE: N.T.S.

PAGE 16

NARROW MODULAR TILE



1. PAVERS SHOWN ABOVE SHALL BE 1" OR 1 ³/₁₆" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS MUST BE MORTAR SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



NARROW MODULAR PAVER TILE - DETAILS

SCALE: N.T.S.