


CALARC® DIVISION



- 1. PAVERS SHOWN ABOVE SHALL BE 2"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SONORASTONE® FINISH (SLATE LOOK)
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES

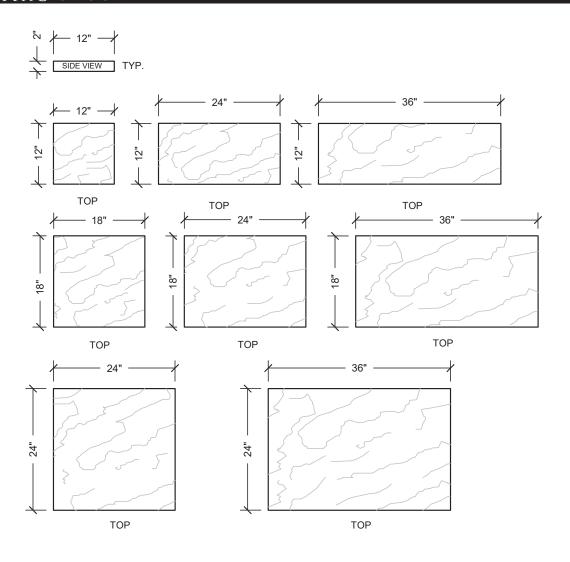

SONORASTONE® PAVER - GENERAL DETAILS

SCALE: N.T.S.


PAGE 25


800.572.9029 STEPSTONEINC.COM


NATIONWIDE DISTRIBUTION



ALARC® DIVISION



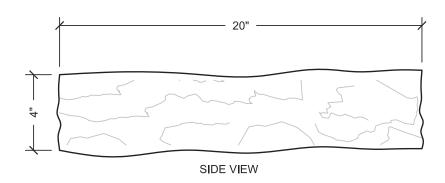

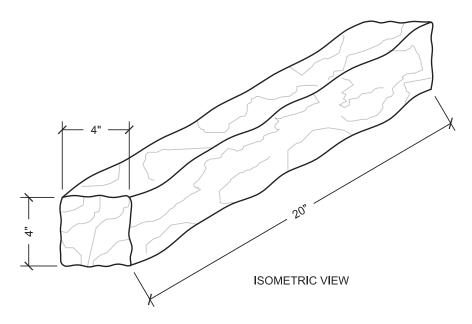

- 1. BORDERSTONE SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. BORDERSTONE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. BORDERSTONE CAN BE MORTAR SET OR SAND SET
- 4. SONORASTONE® FINISH (SLATE LOOK)
- 5. BORDERSTONE IS AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. SEE SPECIFICATIONS FOR TOLERANCES



BORDERSTONE - GENERAL DETAILS

SCALE: N.T.S.

PAGE 26

800.572.9029 STEPSTONEINC.COM