


**PAVER SIZES**

- 12" x 12" x 2"
- 12" x 12" x 4"
- 24" x 24" x 2"
- 24" x 36" x 2 1/2"


1. PAVERS SHOWN ABOVE SHALL BE 2", 2 1/2" OR 4" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE SAND SET OR MORTAR SET
4. STIPPLED OR SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS, FEDERAL YELLOW AND CHARCOAL; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
7. ORIENTATION OF DOMES ON CAST PAVERS IS +/- 1/16" OF SPECIFIED DIMENSIONS
8. ALL DIMENSIONS LISTED HERE ARE INTENDED TO MEET ADA SPECIFICATIONS
9. CONFIRM WITH LOCAL BUILDING CODES/OFFICIALS BEFORE INSTALLATION




## TRUNCATED DOME PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 27

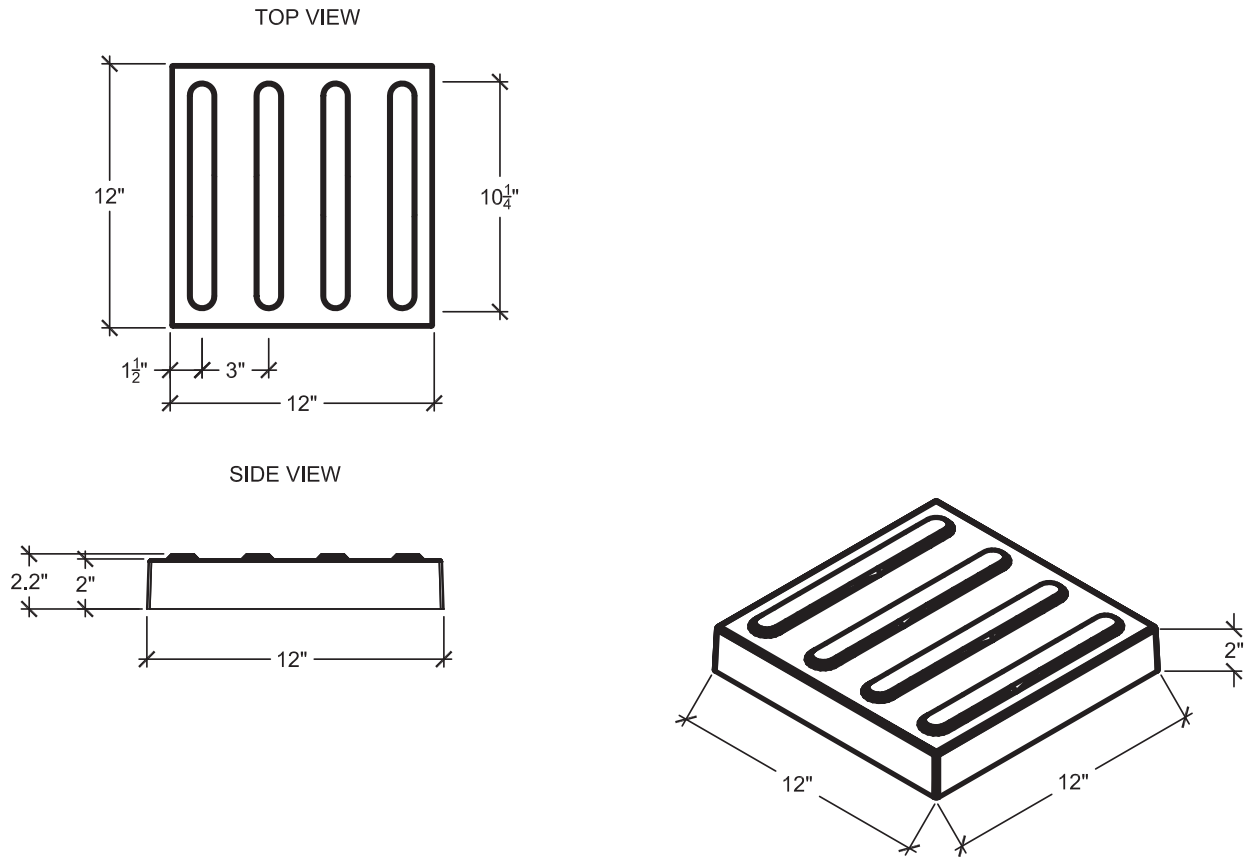

1. PAVERS SHOWN ABOVE SHALL BE 2"; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE SAND SET OR MORTAR SET
4. STIPPLED OR SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS, FEDERAL YELLOW AND CHARCOAL; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
7. ORIENTATION OF DOMES ON CAST PAVERS IS +/- 1/16" OF SPECIFIED DIMENSIONS
8. ALL DIMENSIONS LISTED HERE ARE INTENDED TO MEET ADA SPECIFICATIONS
9. CONFIRM WITH LOCAL BUILDING CODES/OFFICIALS BEFORE INSTALLATION



## TRUNCATED DOME PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 28