



#### **CALARC PAVERS**



#### **SHORT FORM SPECIFICATION**

Sizes: Rounds are 13/4" thick and all other sizes are 2" thick; all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Sandblast or Exposed Aggregate

See Paver Details for more information; visit stepstoneinc.com


Precast concrete pavers are a perfect combination of elegance, durability and ease of installation. Distinctive colors, finishes and a variety of sizes offer creative design options.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### LARGE SCALE CALARC PAVERS

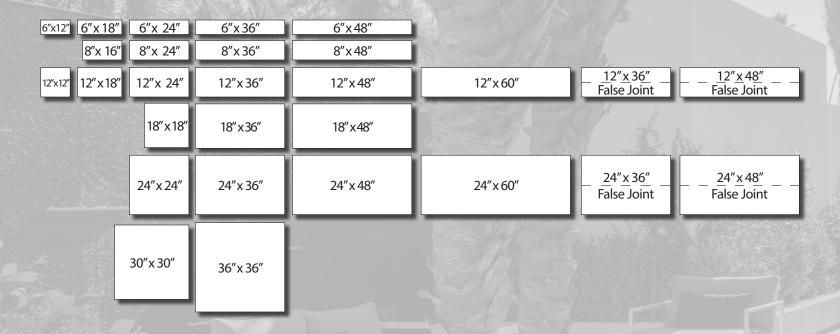

#### **SHORT FORM SPECIFICATION**

Sizes: All sizes are 2 1/2" thick; all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Sandblast or Exposed Aggregate

See Paver Details for more information; visit stepstoneinc.com

Large Scale CalArc Pavers are available up to 60" in size with the same handcrafted elegance found across our entire product line. If your design calls for an immensely dramatic look with refined details Large Scale CalArc Pavers are the grand solution.




Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### **MADERASTONE PAVERS**

11 %" x 47 %" x 2 ½"



SHORT FORM SPECIFICATION

Sizes: All sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Maderastone (wood grain look)

See Paver Details for more information; visit stepstoneinc.com


Made to live like wood and last like concrete. Two different wood grain patterns are mixed in random combinations to create the look and texture of lumber. Stepstone's Maderastone is strong, natural, and lasting and, it won't splinter.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### **SONORASTONE® PAVERS**

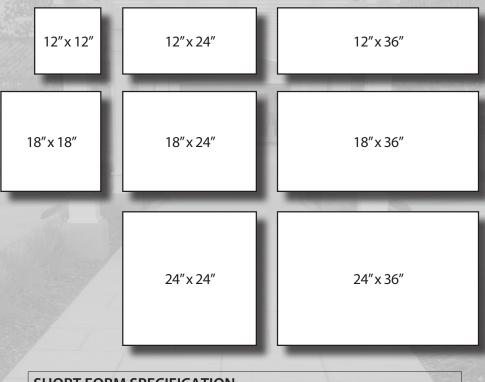

#### **SHORT FORM SPECIFICATION**

Sizes: All sizes are 2" thick; all sizes are nominal Tiles available: 12" x 12" x 1" and 12" x 24" x 1"

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Sonorastone® (slate look)

See Paver Details for more information; visit stepstoneinc.com


Sonorastone® Pavers have a rugged slate-like textured surface and are available in natural shades. With the look and feel of real stone, these pavers will transform your outdoors into a comfortable and elegant living space.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### NARROW MODULAR PAVERS BY STEPSTONE®

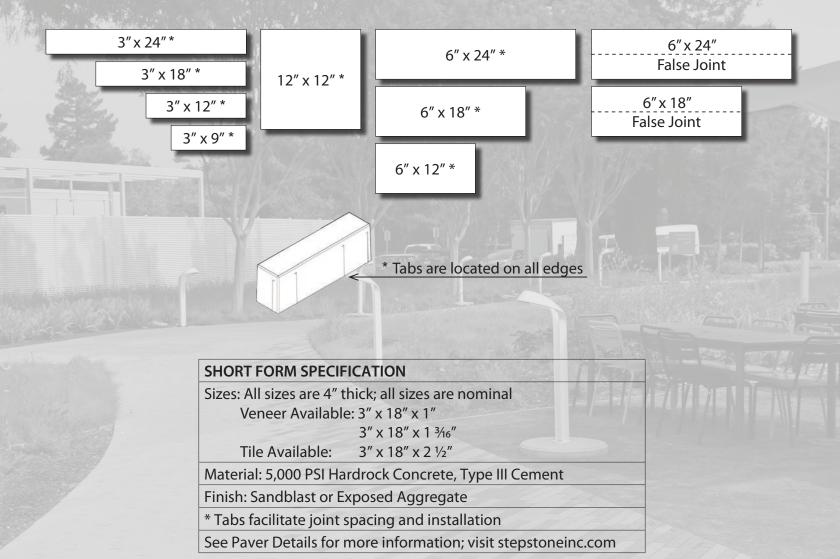


Distinctive precast concrete pavers by Stepstone, Inc. offer a uniquely modern, sleek linear look that will enhance any landscape.





Stepstone strongly recommends that you make your color selection using actual color concrete samples.




#### **WAVE PAVERS**









#### **SHORT FORM SPECIFICATION**

Sizes: All sizes are 4" thick; all sizes are nominal


Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Sandblast or Exposed Aggregate


See Paver Details for more information; visit stepstoneinc.com

Originally inspired by Spanish design and destined for popular seasides, this exciting new concept has inspired architects and designers to use our newest paver in their own creations. Wave Pavers offer a distinct and uniquely different look to enhance any landscape.





























#### **HEXAGONAL PAVERS**

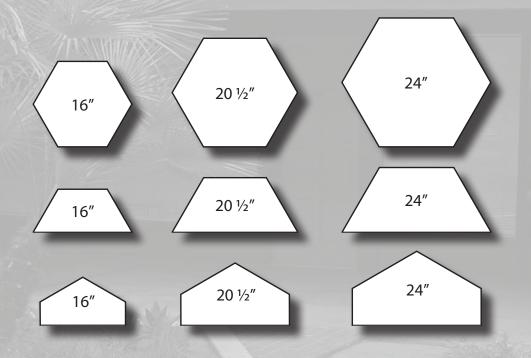

#### **SHORT FORM SPECIFICATION**

Sizes: 16" sizes are 2" thick; 20" and 24" sizes are 2 1/2" thick; all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finish: Sandblast or Exposed Aggregate

See Paver Details for more information; visit stepstoneinc.com


This six sided retro-new paver shape will enhance a patio, walkway, or most any pedestrian space with classic styling. Hexagonal pavers come in an assortment of sizes all with coordinated flat-half and point-half connecting pieces that are used to create linear transitions and finished edges to the design.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.




#### **DIAMOND PAVERS**

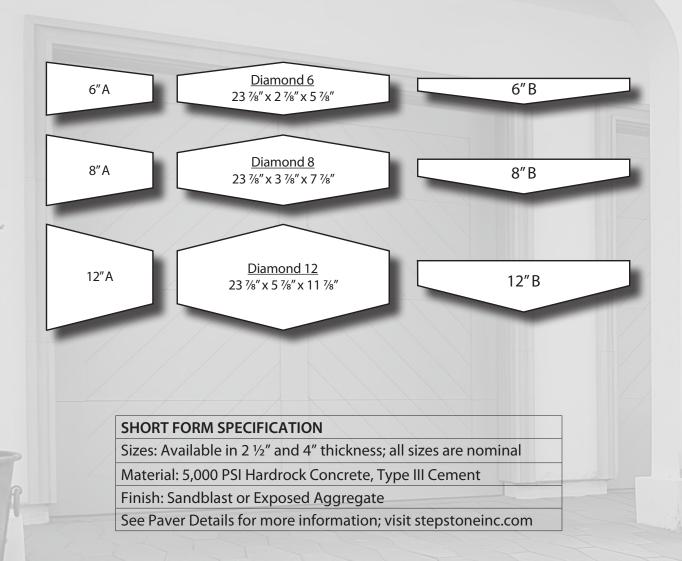

With a harlequin-like shape, Stepstone Diamond pavers are designed with narrowed straight ends making them more durable than pavers with pointed, fragile tips. Available in versatile sizes, Diamond Pavers have corresponding flat half and point half connecting pieces.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.

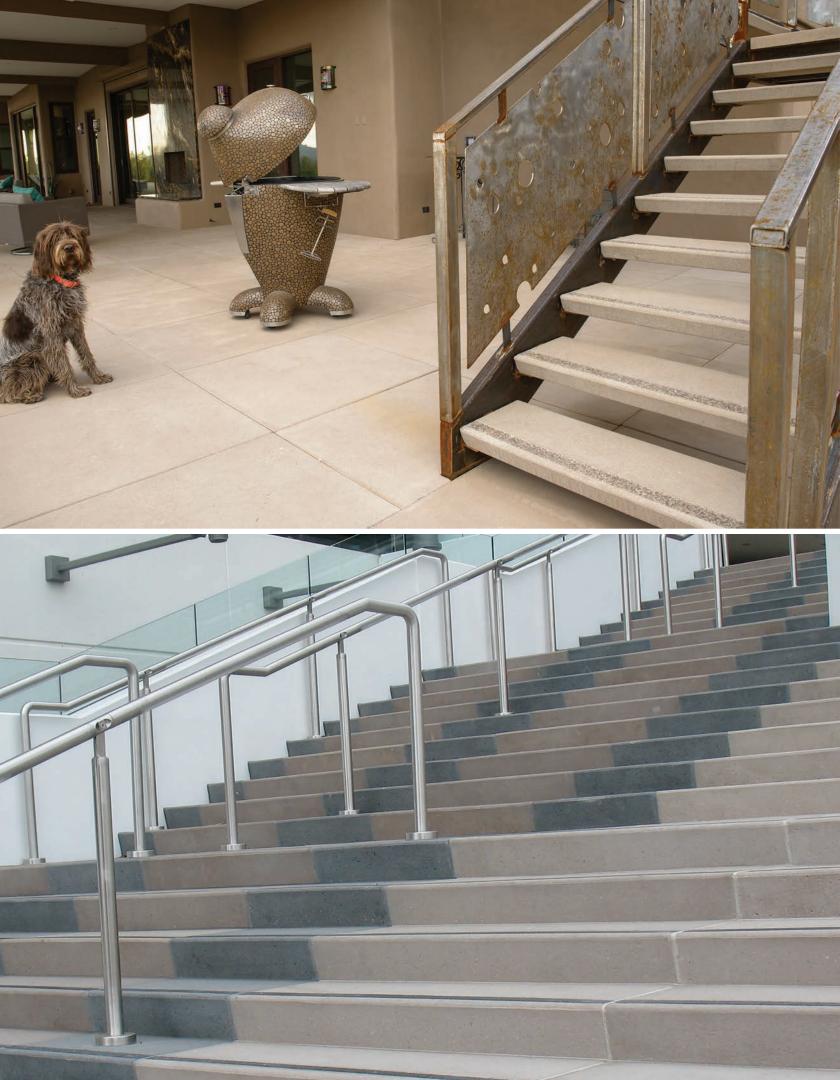

#### STANDARD STAIRTREADS

#### **Open Riser Profiles**

Square

Bullnose

Wedge

# Closed Riser Profiles Modern Classic

#### SHORT FORM SPECIFICATION

Sizes: 10" - 15" x up to 60" and 2 1/2" thick; all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement


Reinforced: Zinc-Plated Welded Wire Mesh

Finish: Broom, Sandblast or Exposed Aggregate

Nose Finish: Smooth or Exposed Aggregate


Stripe: With or without contrasting stripe

See Steptread Details for more information; visit stepstoneinc.com

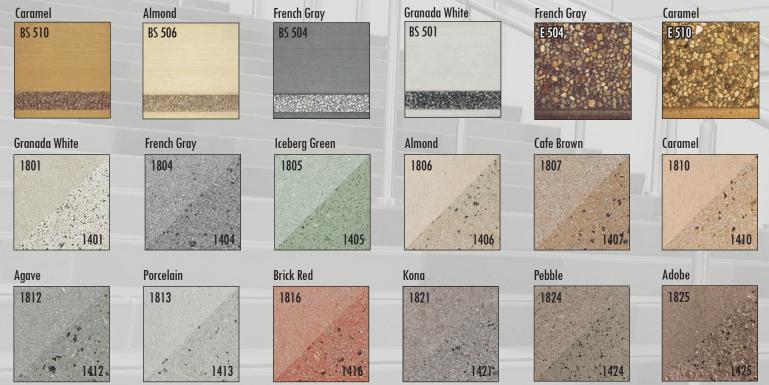



#### LONG SPAN CLOSED RISER STAIRTREADS

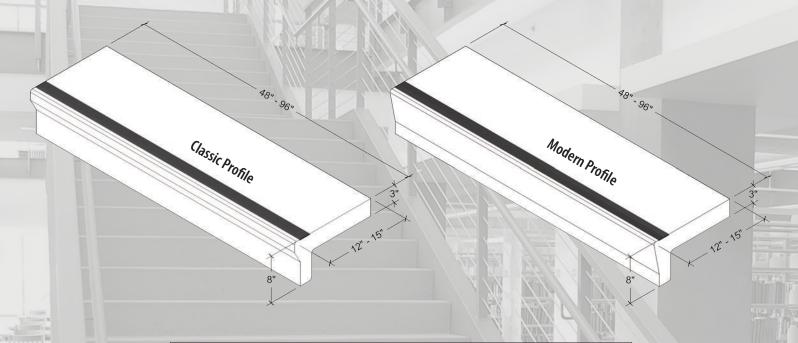

#### **SHORT FORM SPECIFICATION**

Sizes: 10" - 15" x up to 96"; all sizes are nominal


Material: 5,000 PSI Hardrock Concrete, Type III Cement

Reinforced: Zinc-Plated Welded Wire Mesh

Finish: Broom, Sandblast or Exposed Aggregate


Stripe: With or without contrasting stripe

See Steptread Details for more information; visit stepstoneinc.com

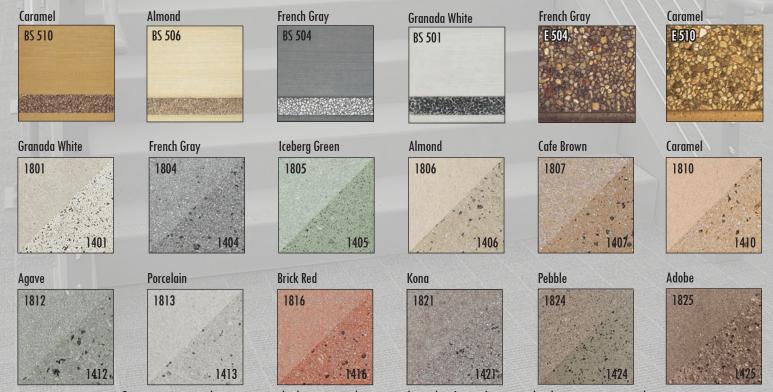



#### PEDESTAL SET ROOF PAVERS

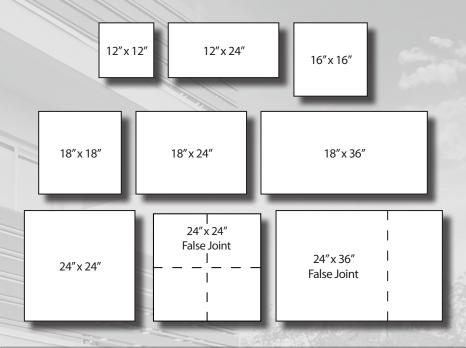

#### SHORT FORM SPECIFICATION


Sizes: All sizes 2" thick; all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Reinforced: Zinc-Plated Welded Wire Mesh

Finishes: Sandblast & Exposed Aggregate

See Roof Paver Details for more information; visit stepstoneinc.com

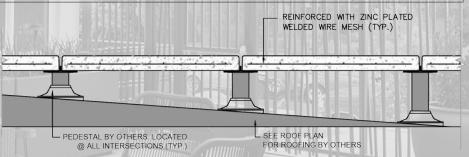


Stepstone proudly distributes the Bison IP pedestal system.





#### LARGE SCALE CALARC PEDESTAL SET PAVERS

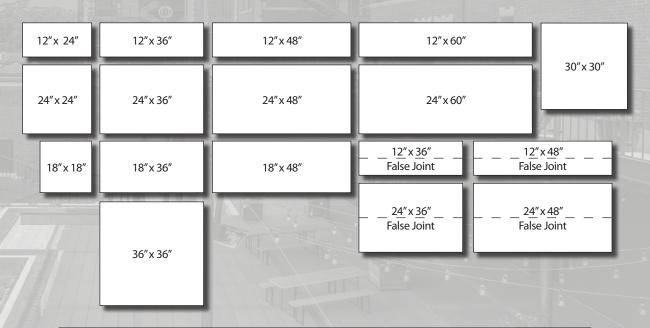


#### SHORT FORM SPECIFICATION

Sizes: All sizes are 2 1/2" thick; all sizes are nominal


Material: 5,000 PSI Hardrock Concrete, Type III Cement

Reinforced: Zinc-Plated Welded Wire Mesh Finishes: Sandblast & Exposed Aggregate

See Roof Paver Details for more information; visit stepstoneinc.com

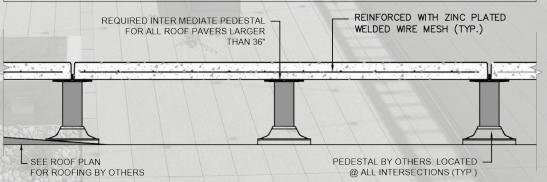


Stepstone proudly distributes the Bison IP pedestal system.

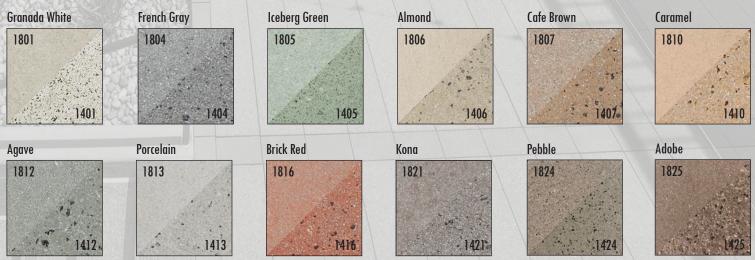



#### LIGHTWEIGHT ROOF PAVERS

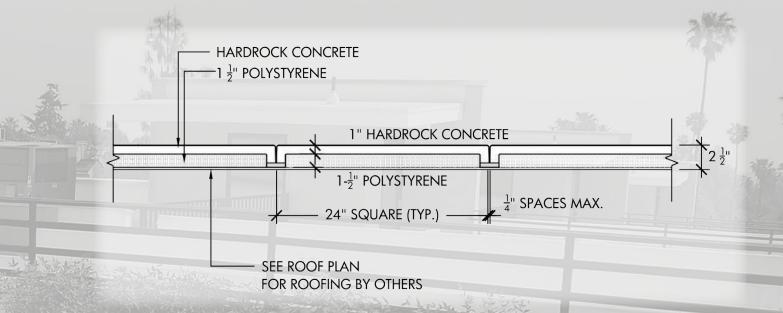

#### **SHORT FORM SPECIFICATION**

Sizes: 24" x 24" x 2 1/2" (Typical); all sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Laminated to 25 PSI Compressive Strength/2# density EPS

Finishes: Sandblast & Exposed Aggregate

See Roof Paver Details for more information; visit stepstoneinc.com


Lightweight Roof Pavers (12 PSF) were designed for applications where an existing roof or new roof requires a lighter load. Cast with 1" of concrete laminated to 1½" of expanded polystyrene foam, these pavers have the look of a full weight roof paver but weigh in at roughly half the load.



Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### **DRYDECK® ROOF PAVERS**

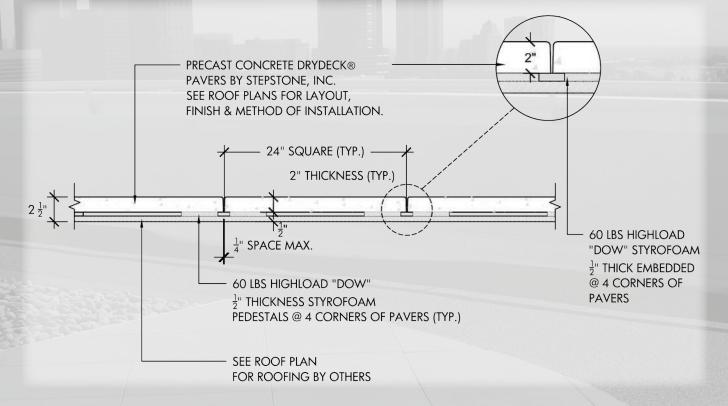


# SHORT FORM SPECIFICATION Sizes: 24" x 24" x 2 ½" (Typical); all sizes are nominal Material: 5,000 PSI Hardrock Concrete, Type III Cement 60# Density DOW Extruded Polystyrene pedestal feet Finishes: Sandblast & Exposed Aggregate See Roof Paver Details for more information; visit stepstoneinc.com

Drydeck® pavers (22 PSF) have a Dow extruded polystyrene pedestal (60# density) cast into each corner to raise the paver ½" off the waterproof surface allowing drainage under the roof pavers.





#### **ROOFTRAC® PAVERS**

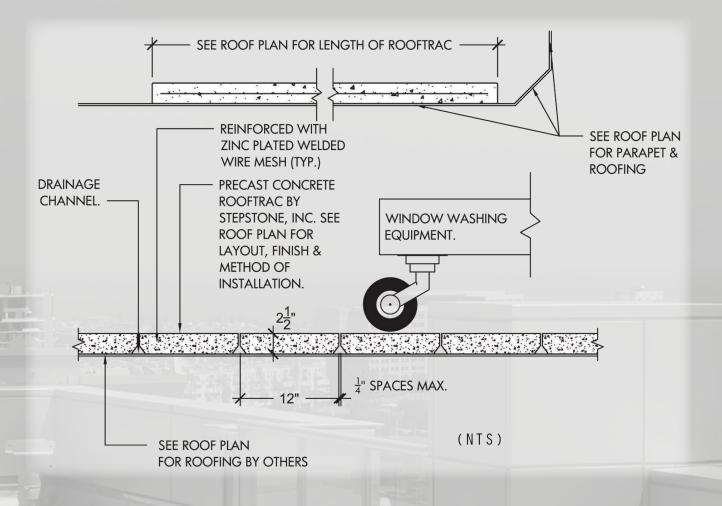


SHORT FORM SPECIFICATION
Sizes: 12" x 48" x 2 1/2" (Typical); all sizes are nominal
Material: 5,000 PSI Hardrock Concrete, Type III Cement
Reinforced: Zinc-Plated Welded Wire Mesh
Finish: Broom
See Roof Payer Details for more information; visit stepstoneinc.com

Rooftrac® includes beveled bottom edges to provide drainage channels at the joints. Standard and custom colors are available to meet your project's requirements.





#### **DEKSTONE®**

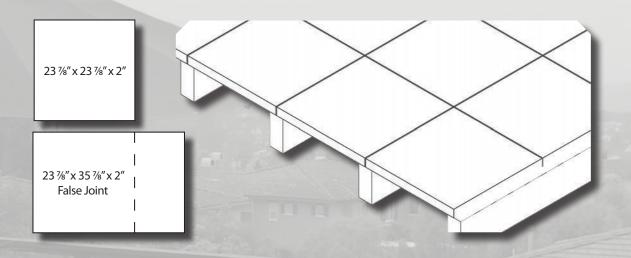

#### **SHORT FORM SPECIFICATION**

Sizes: All sizes are 2" thick; all sizes are nominal


Material: 5,000 PSI Hardrock Concrete, Type III Cement

Reinforced: Zinc-Plated Welded Wire Mesh

Finishes: Sandblast & Slate Texture (Sonorastone® swatches shown on Page 7)

See Dekstone® Details for more information; visit stepstoneinc.com

Dekstone® pavers require 1½" bearing on two parallel sides. Paver supports must be 23%" on center. L Brackets, for paver-to-joist attachment, available upon request.

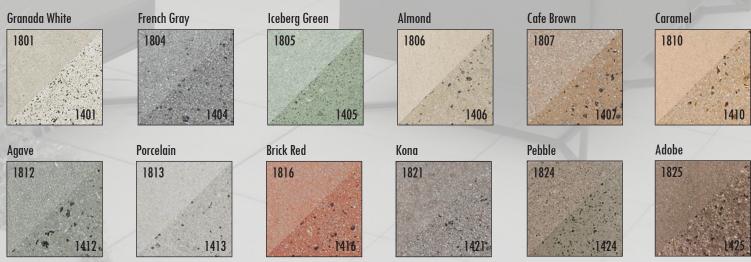


Stepstone strongly recommends that you make your color selection using actual color concrete samples.







## WALL CAP CLASSIC • SONORASTONE® • SQUARE MODULAR

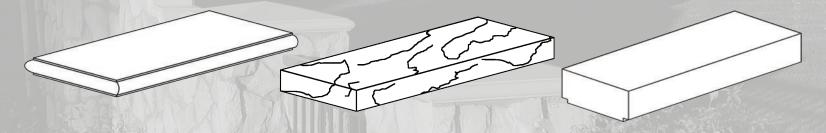

#### **SHORT FORM SPECIFICATION**

Sizes: Classic 8" x 24" x 2 ½" 10 ¼" x 24" x 2 ½" 12" x 24" x 2 ½" 14" x 24" x 2 ½" 16" x 24" x 2 ½" 24" x 24" x 2 ½"

Sonorastone®-Peaked 9 1/4" x 24" x 3" 12 1/4" x 24" x 3 1/4" 16 1/4" x 24" x 3 3/4"

Sonorastone®-Flat 7 1/4" x 24" x 2 1/2" 9 1/4" x 24" x 2 1/2" 13 1/4" x 24" x 2 1/2"

All sizes are nominal.

Square Modular

7 ¼" x 24" x 3 ¾" 9 ¼" x 24" x 3 ¾" 13 ¼" x 24" x 3 ¾"


20 ¼" x 24" x 3 ¾"

Material: 4,000 PSI Hardrock Concrete, Type III Cement

Finishes: Smooth, Sandblast & Slate Texture (Sonorastone® swatches shown on Page 7)

More sizes, radius pieces, and Pilaster Caps available

See Wall Cap Details for more information; visit stepstoneinc.com

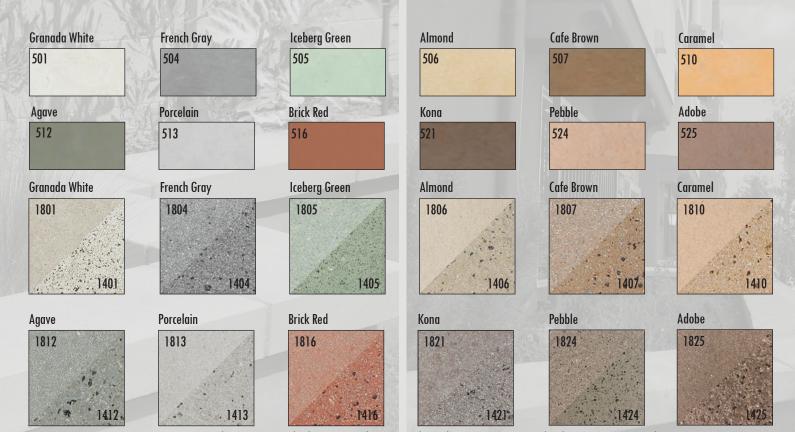


Stepstone strongly recommends that you make your color selection using actual color concrete samples.





#### **POOL COPING CLASSIC • MODERN • SQUARE MODULAR**

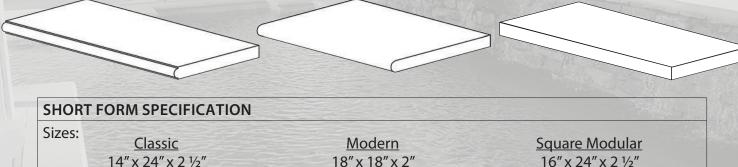

Inside Radius: 1', 2', 3', 4', 6', 8' Outside Radius: 2', 3', 4', 6', 8' Inside and outside corners

1" radius bullnose with 1/4" top and bottom reveal

18" x 24" x 2" Straights and outside corners

16" x 36" x 2 1/2"

16" x 16" x 2 1/2" (Corner)

1" radius bullnose


All sizes are nominal.

Material: 4,000 PSI Hardrock Concrete, Type III Cement

Finishes: Sandblast & Stippled

See Pool Coping Details for more information; visit stepstoneinc.com


The Classic profile is available in standard inside and outside radius' and inside and outside corners. The Square Modular profile is available in straights and corners and two lengths.

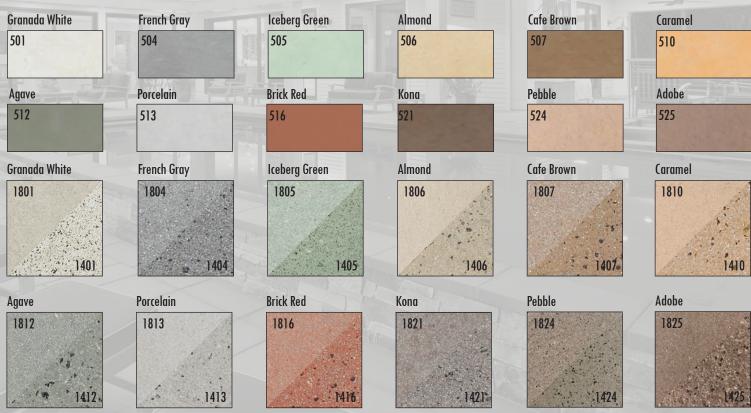

Stepstone strongly recommends that you make your color selection using actual color concrete samples.



# GARDEN STEP CLASSIC • MODERN • SQUARE MODULAR



#### SHORT FORM SPECIFICATION

Sizes:

Classic 14" x 24" x 2 ½"

Inside Radius: 1', 2', 3', 4', 6', 8' Outside Radius: 2', 3', 4', 6', 8' Inside and outside corners 1" radius bullnose with ¼" top and bottom reveal <u>Modern</u>

18" x 18" x 2" 18" x 24" x 2"

Straights and outside corners
1" radius bullnose

Square Modular 16" x 24" x 2 ½"

16" x 36" x 2 ½"

16" x 16" x 2 ½" (Corner)


All sizes are nominal.

Material: 4,000 PSI Hardrock Concrete, Type III Cement

Finishes: Sandblast & Stippled

See Garden Step Details for more information; visit stepstoneinc.com


On grade or mortar set, Stepstone Garden Steps are a beautiful solution to outdoor elevation changes. Use precast concrete treads and risers to finish an entryway or to create steps into a garden.

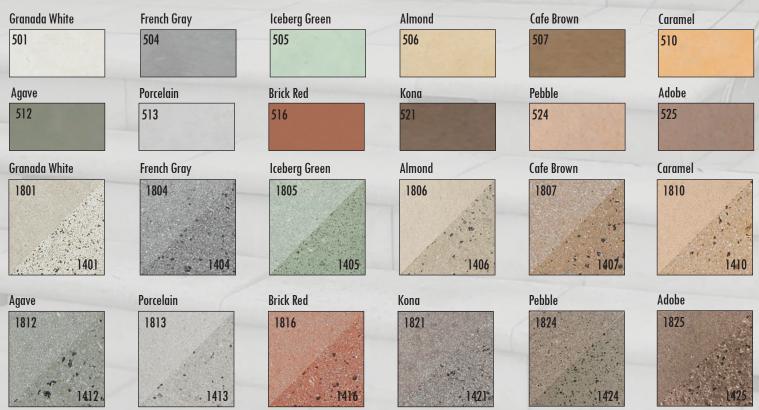

Stepstone strongly recommends that you make your color selection using actual color concrete samples.



#### TRUNCATED DOME PAVERS

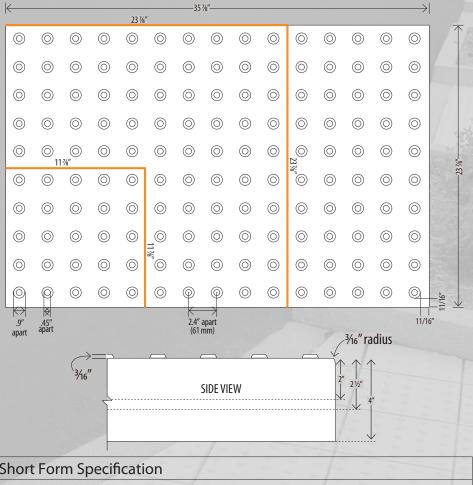

**Short Form Specification** 

Sizes:

12" x 12" x 2" 12" x 12" x 4" 24" x 24" x 2" 24" x 36" x 2 1/2" All sizes are nominal

Material: 5,000 PSI Hardrock Concrete, Type III Cement

Finishes: Stippled or Sandblast

Orientation of domes on cast pavers is 1/2 1/16" of specified dimensions All Dimensions listed here are intended to meet ADA specifications. Confirm with local building codes/officials before installation.

Designed to be installed with a 1/8" joint.

Provide a detectable warning surface in paving transition areas with Stepstone's Truncated Dome Pavers. Available in several practical and complementary colors to provide an aesthetic visual and detectable transition.







Stepstone, Inc.

### **CALARC PRODUCT LINE**

stepstoneinc.com 800.572.9029



PLEASE NOTE: All of our products are made by hand from natural materials. Variations in color are to be expected. To confirm color, please refer to actual concrete samples before placing order. Shipping may result in minor chipping. This is not detrimental to appearance or function. Stepstone, Inc. recommends sealing to aid in grout removal and cleaning prior to installation. Grout naturally will bond with concrete. Immediately remove any grout slurry that comes in contact with the finished face of the precast concrete pieces. All sizes are nominal. See details for further information. Available in other standard colors. See actual color concrete samples before ordering This material is copyrighted and is intended solely for the use of customers of Stepstone, Inc.

12-2019